





LED Cabinet Puck Light Installation Guide

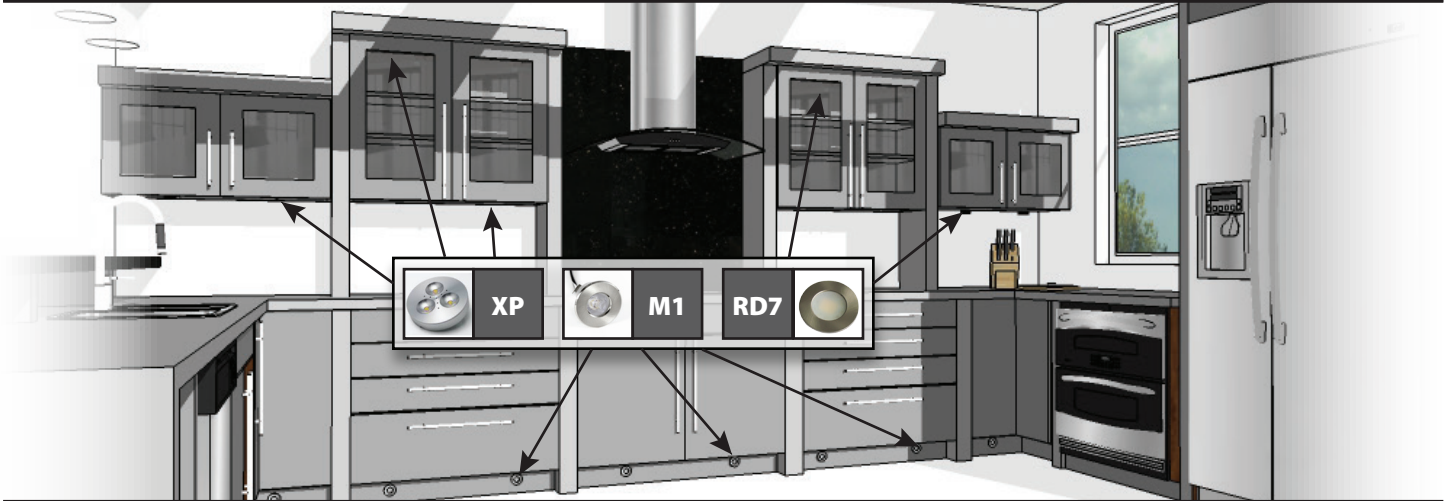

Recommended recessed puck light every 18 inches

JOB#

LED CABINET LIGHTS

PUCK DESIGN	CHOOSE FINISH	CHOOSE LIGHT COLOUR	CALCULATIONS
 <p>M1 PUCK LIGHT CUT-OUT: 1 3/8 in. DIMENSIONS: Ø1.54 x H.94 in.</p>	<input type="checkbox"/> BLACK ROUND <input type="checkbox"/> WHITE ROUND <input type="checkbox"/> BRUSHED NICKEL ROUND <input type="checkbox"/> BLACK SQUARE <input type="checkbox"/> WHITE SQUARE <input type="checkbox"/> BRUSHED NICKEL SQUARE	<input type="checkbox"/> 3000K Warm White <input type="checkbox"/> 6000K Cool White	<p>VOLTAGE: 12V DC WATTAGE: 1W SPREAD: 45° LUMENS: 95</p> <p>WATTS: 1 X QTY: = TOTAL WATTAGE:</p>
 <p>RD7 PUCK LIGHT CUT-OUT: 1.75 in. DIMENSIONS: Ø1.97 x 0.75 in.</p>	<p>INCLUDES: Recessed trim ring</p> <input type="checkbox"/> WHITE <input type="checkbox"/> BLACK <input type="checkbox"/> BRUSHED NICKEL SURFACE <input type="checkbox"/> BRUSHED NICKEL RECESSED	<input type="checkbox"/> 2700K Candlelight <input type="checkbox"/> 3000K Warm White <input type="checkbox"/> 4500K Natural White <input type="checkbox"/> 6000K Cool White	<p>VOLTAGE: 12V DC WATTAGE: 2W SPREAD: 120° LUMENS: 200</p> <p>WATTS: 2 X QTY: = TOTAL WATTAGE:</p>
 <p>XP PUCK LIGHT CUT-OUT: 2.5 in. DIMENSIONS: Ø2.75 x 0.53 in.</p>	<p>INCLUDES: Matching surface mount bezel Recessed & surface mountable</p> <input type="checkbox"/> POWDER COATED BLACK <input type="checkbox"/> POWDER COATED WHITE <input type="checkbox"/> BRUSHED CHROME	<input type="checkbox"/> 3000K Warm White <input type="checkbox"/> 6000K Cool White	<p>VOLTAGE: 12V DC WATTAGE: 3W SPREAD: 120° LUMENS: 290</p> <p>WATTS: 3 X QTY: = TOTAL WATTAGE:</p>

POWER SUPPLIES

ADD 10% TO THE TOTAL WATTAGE FROM LED LIGHT SELECTION TABLE ABOVE ie: 12 x M1 Step Lights =12W, 6 x RD7 Cabinet Lights =12W.
(WATTS X QTY = TTL WATTAGE) +10% =MIN. Required Wattage of Power Supply TOTAL Wattage: 12+12 =24W + 10% =26.4W minimum. MINIMUM 30W DRIVER IS REQUIRED.

	DRIVER	SKU	VOLTAGE	WATTAGE	OUTPUT	DIMENSIONS	CHOOSE WIRING:	CALCULATIONS:	QUANTITY
NON DIMMING	15W LED Power Supply	15W-Driver	120V AC	15W MAX	12V DC	L4.37 X W1.81 X H0.79 in.	<input checked="" type="checkbox"/> HARDWIRE <input checked="" type="checkbox"/> PLUG		
	30W LED Power Supply	30W-Driver	120V AC	30W MAX	12V DC	L7.30 X W1.14 X H0.79 in.	<input checked="" type="checkbox"/> HARDWIRE <input checked="" type="checkbox"/> PLUG		
	60W Indoor/Outdoor LED Power Supply	60W-0-Driver	100-265V AC	60W MAX	12V DC	L7.44 X W1.89 X H1.30 in.	<input checked="" type="checkbox"/> HARDWIRE <input checked="" type="checkbox"/> PLUG		
DIMMING	24W Dimmable LED Power Supply	24D-CV	120V AC	24W MAX	12V DC	L6.10 X W2.13 X H0.79 in.	<input checked="" type="checkbox"/> HARDWIRE <input checked="" type="checkbox"/> PLUG		
	60W Dimmable LED Power Supply	60W-Dim-CV	120V AC	60W MAX	12V DC	L7.30 X W1.14 X H0.79 in.	<input checked="" type="checkbox"/> HARDWIRE <input checked="" type="checkbox"/> PLUG		

To order please call: Local: 604.216.0448 Toll Free: 1.866.852.7397



© 2018 All rights reserved
GBL LED Lighting Inc.