


GBL LED Lighting Commercial Grade Outdoor String Lights



JOB#

Suspended (4ft. beginning lead with plug, 2ft. socket spacing)

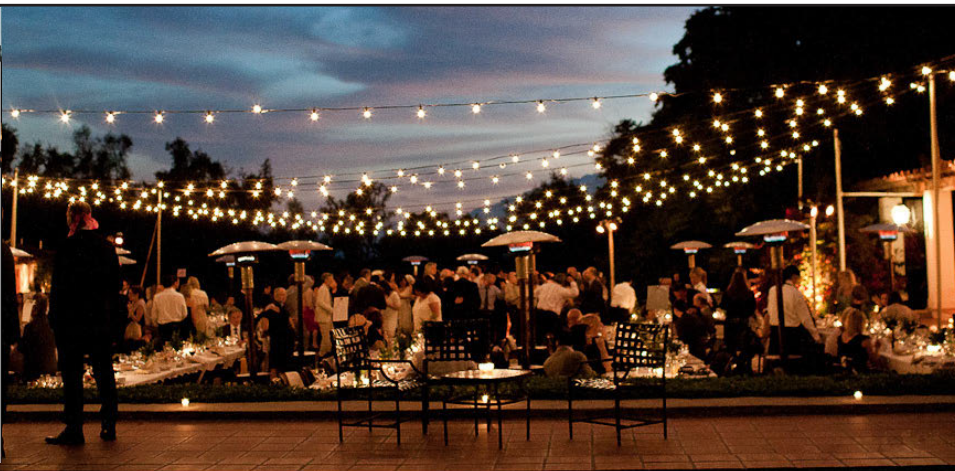


50 ft. Suspended

S-24-50'
120V AC, MAX 600W
24 x E26 medium base sockets
50' lengths can be plugged together

100 ft. Suspended

S-48-100'
120V AC
48 x E26 medium base sockets
Max Wattage: 1200W

Non-Suspended (4ft. beginning lead with plug, 2ft. socket spacing)

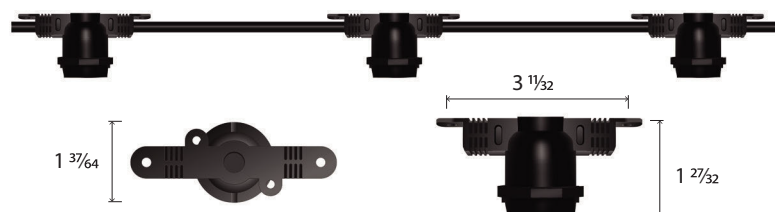

50 ft. Non-Suspended

NS-24-50'
120V AC, MAX 600W
24 x E26 medium base sockets
50' lengths can be plugged together

100 ft. Non-Suspended

NS-48-100'
120V AC
48 x E26 medium base sockets
Max Wattage: 1200W

E26 Medium Base Decorative LED Bulbs



S14 - Frost
E26-S14-FST
120V AC, 1.4W, E26 medium
Ø45 x H63mm
Ø1.75 x H3.50 in.



S14 - Clear
E26-S14-CLR
120V AC, 1.4W, E26 medium
Ø45 x H63mm
Ø1.75 x H3.50 in.



S14 - Dimmable Filament
E26-S14-FIL
120V AC, 2W, E26 medium
Ø45 x H63mm
Ø1.75 x H3.50 in.




S11 - Frost
E26-S11-CLR-XX
120V AC, 1W, E26 medium
Ø40 x H61mm
Ø1.57 x H2.40 in.



S11 - Clear
E26-S11-CLR-XX
120V AC, 1W, E26 medium
Ø40 x H61mm
Ø1.57 x H2.40 in.



Aircraft Cable
Order by the foot

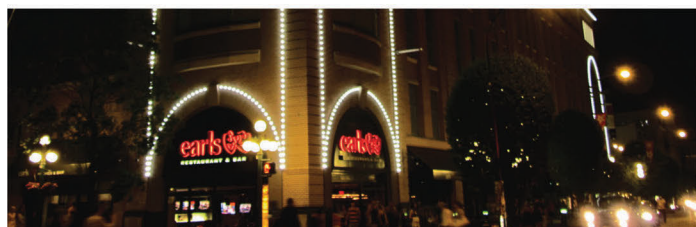

To order please call: Local: 604.216.0448 Toll Free: 1.866.852.7397



© 2018 All rights reserved
GBL LED Lighting Inc.